


BID ALTERNATE #1:

CONTRACTOR SHALL PROVIDE A SEPARATE COST IN HIS BID PROPOSAL TO PROVIDE ALL MATERIAL (INCLUDING BUT NOT LIMITED TO SCOREBOARD MOUNTED CAMERA, NEMA ENCLOSURE, POWER AND COMMUNICATION WIRING AND CONDUITS, HAND HOLES, TRENCHING, EXCAVATING, BACKFILLING, ETC.) INCLUDING ALL ASSOCIATED LABOR FOR NEW PROPOSED SCOREBOARD.

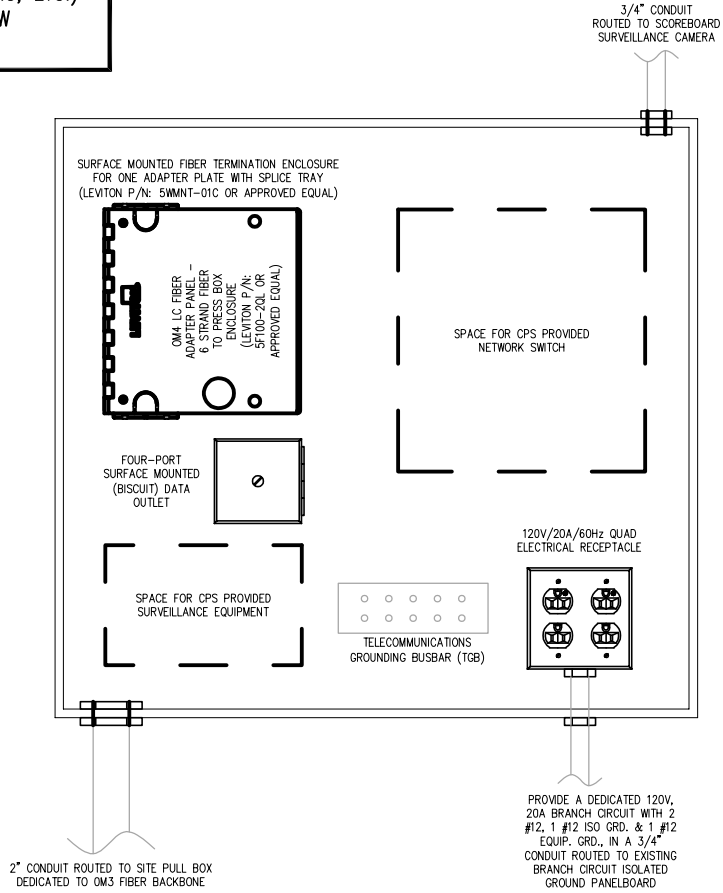

NOTES:

1. PROVIDE A 24"W x 24"L x12"D NEMA 4X RATED ENCLOSURE WITH LOCKING DOOR.
2. THE ENCLOSURE'S DOOR SHALL BE MONITORED BY DOOR POSITION SWITCH CONNECTED TO THE EXISTING HONEYWELL VISTA 50P INTRUSION DETECTION SYSTEM.
3. EACH COMPONENT SHALL BE MOUNTED WITH A MINIMUM OF 2" OF SPACE BETWEEN ADJACENT COMPONENTS OR THE ENCLOSURE WALL.
4. REFER TO SITE PLAN AND DETAILS FOR CABLE REQUIREMENTS AND ROUTING.
5. PROVIDE A 6AWG GROUNDING CABLE CONNECTION FROM IT ENCLOSURE TGB BACK TO NEAREST ELECTRICAL GROUNDING SYSTEM.

CHICAGO PUBLIC SCHOOLS
 CAPITAL IMPROVEMENT PROGRAM
 OFFICE OF SAFETY AND SECURITY
 SECURITY STANDARDS
 IT ENCLOSURE "NE-1"DETAIL



DESIGNED	CPS	PROJECT:	ITS SYSTEM-DETAILS		SHEET NO. ED-240
DRAWN	CPS	PROJECT NUMBER	SCALE	DATE	
CHECKED	CPS	XXXX	NONE	02/27/19	
APPROVED	CPS				
NO.	DATE	REVISION	BY		