


NOTE:

1. IF CEILING LINE IS 9' 6" OR LESS, THEN MOUNT 2444 DEVICE BOX OR FLUSH BOX (NEW CONSTRUCTION) CENTERED 10" BELOW CEILING LINE
2. IF CEILING LINE IS GREATER THAN 9' 6", THEN MOUNT 2444 DEVICE BOX OR FLUSH BOX (NEW CONSTRUCTION) CENTERED AT 8' 11" AFF.
3. FOR 2400 SERIES SURFACE MOUNTED METAL RACEWAY INSTALL DATA/VOICE CABLES IN 1/3 PORTION OF DIVIDED RACEWAY. 1/3 PORTION WILL BE MOUNTED ON THE LEFT SIDE WHEN FACING THE VERTICALLY MOUNTED SECTION.

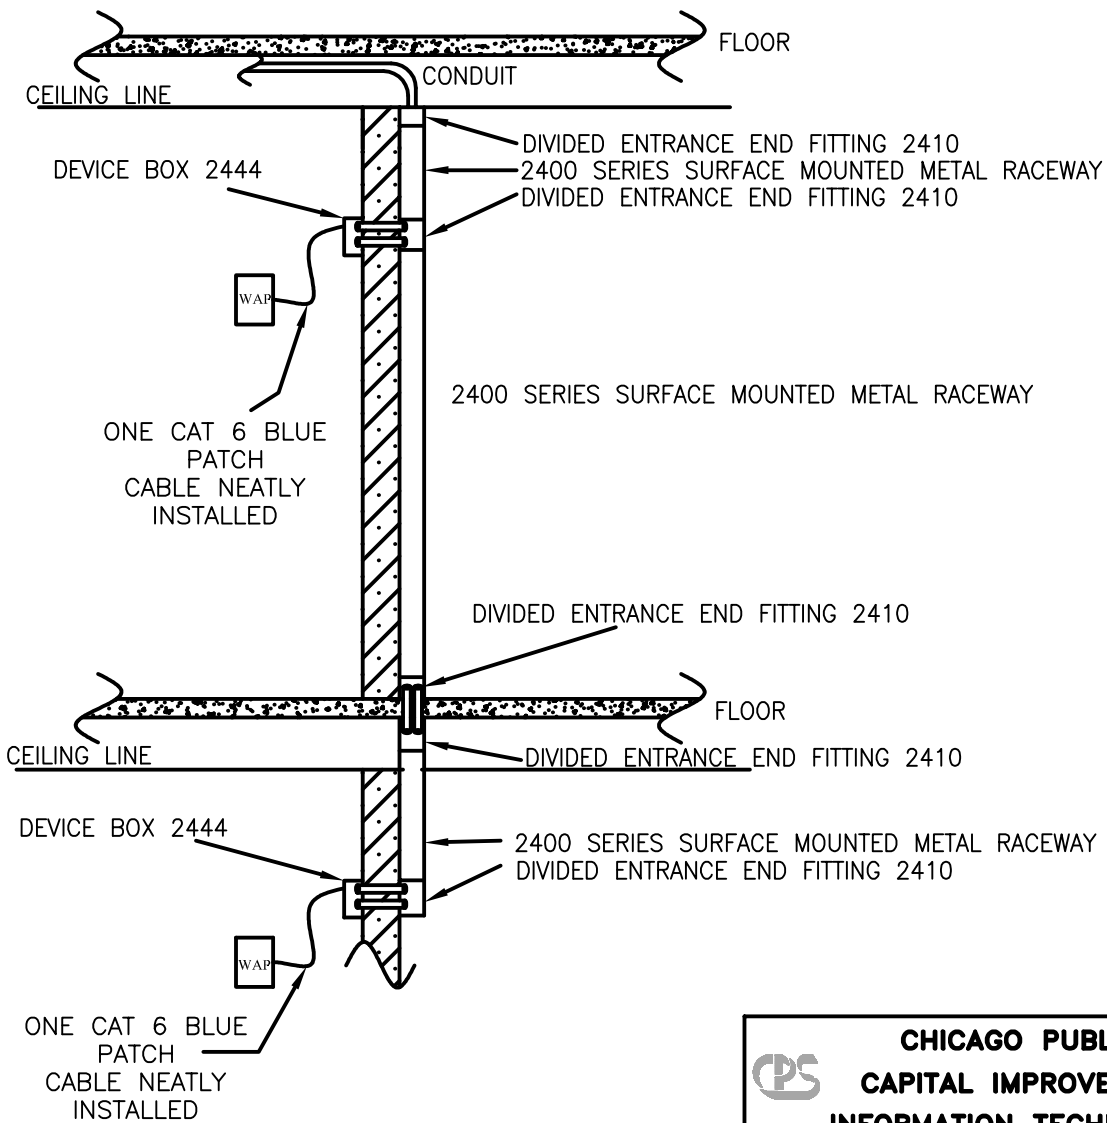


**CHICAGO PUBLIC SCHOOLS  
 CAPITAL IMPROVEMENT PROGRAM  
 INFORMATION TECHNOLOGY SERVICES  
 INFRASTRUCTURE STANDARDS**  
**WAP RACEWAY – VERTICAL  
 FLOOR TO FLOOR FEED**

		DESIGNED CPS			SHEET NO. <b>ED.855</b>	
		DRAWN CPS				
		CHECKED CPS	PROJECT NUMBER	SCALE NONE		DATE 08/28/08
		APPROVED CPS				
NO.	DATE	REVISION	BY			